INSTALLATION GUIDE & MAINTENANCE

MOV-T003-1

STANDARD INSTALLATION

- 1. These equipments are acquired a safety ground surface such as Rubber mat or impact-absorbing material under and all around play equipments.
- 2. Accessible Routes (Reference)

A ground-level accessible route connects play components at ground level.


- 60 inches (1525mm) minimum clear width
- 1:16 maximum slope

Smaller play areas (Less than 1,000square feet (304.8 square meter))

- 44 inches (1120mm) clear width
- 3. Make sure you have a playground layout drawing and footing details.
- 4. Concrete will need at least 3days to fully cure and site must be prepared and leveled.
- 5. First, you should make sure you have everything for your shipment.
- 6. Suggested tool lists
 - Tape Measure
 - Felt Tip Pen
 - 1 Rubber hammer
 - 1 Roll of String
 - Pliers
 - 14mm x 17mm Ratchet wrench
 - Extension cord
 - Power source
 - Concrete (in ground)
 - Adjustable Wrenches
 - Ladders
 - Spanner
 - Ratchets for 8mm
 - Digger equipment (Shelves, or Heavy equipment)
 - Electric Drill
 - Electric Impact Drill
 - 4mm Allen Wrench
 - Bolt Cutter

Basic Installing method


- *Footing (Surface mount)
- 1. Draw line as footing layout drawing.
- 2. Make sure the ground level of site.
- 3. Assemble Deck with posts.
- 4. Adjust right position.
- 5. Assemble Climbers (i.e. Arched climber, Chain climber, etc.)
- 6. Assemble Slides.
- 7. Assemble Panel.
- 8. Make sure the anchoring of all equipment.
- 9. Tighten all bolts and nuts.





- 1. Make sure the ground level of site.
- 2. Draw line as footing layout drawing.
- 3. Dig ground.
- 4. Bury concrete cube.
- 5. Assemble Deck with posts.
- 6. Adjust right position.
- 7. Assemble Climbers (i.e. Arched climber, Chain climber, etc.)
- 8. Assemble Slides.
- 9. Assemble Panel.
- 10. Make sure the anchoring of all equipment.

absorbing material under and all playground equipment.

11. Tighten all bolts and nuts.










PART NAME :

FOOT (UNDER THE GROUND) SCALE: 1/30


PART NO :

FOOT-C-INS1


FOOT (Ø114 post use)




FOOT(climber, support bar use)



FOOT (slide or tube slide use)



FOOT (spiral slide use)



* It is the method that the foot is in the concrete with mold.





PART NAME :

FOOT (UNDER THE GROUND)


PART NO :

FOOT-C-INS2

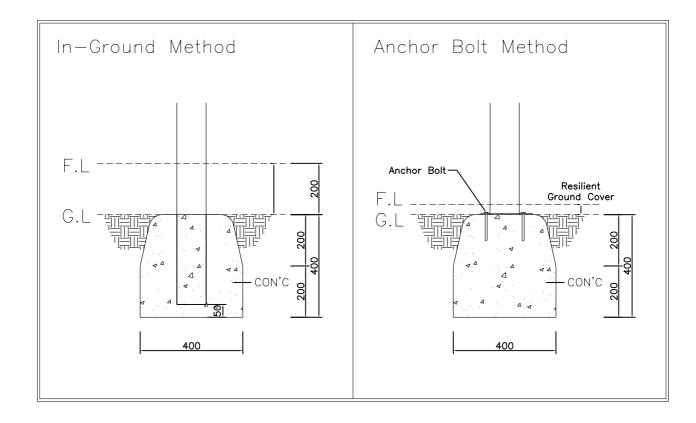

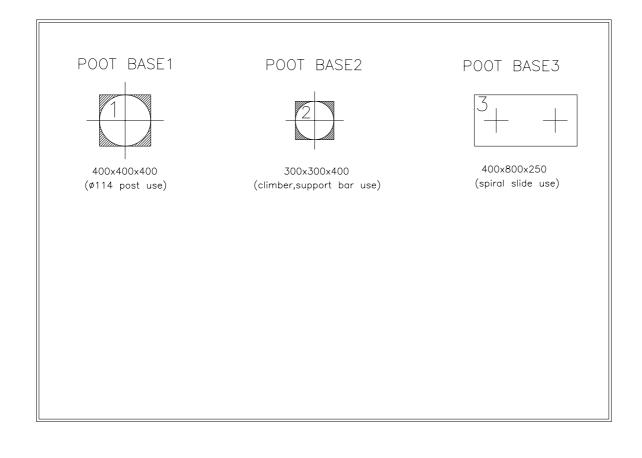



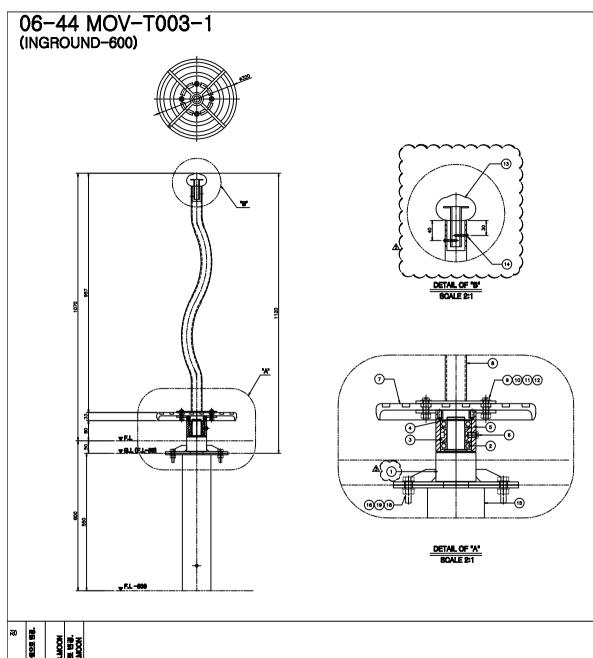

| | | | | 용 오 차 _{두 제} | 30초과 50이하 50초과 150이하 150초과 300이하 300초과 500이하 500이상 | 0\2 0.4 0.\$ 0.6 0.4\ 0.8 0.6\ 1.2 0.8\ 1.6 | 0 1 1 | \(\begin{array}{c ccccccccccccccccccccccccccccccccccc | | |
|------|------|-------|------|-------------------------------|----------------------------------------------------------------|---------------------------------------------------------|-------------|--------------------------------------------------------|---------|--|
| 소 | 요량 | QUANT | TEN | -1 - | 명 DESCRIPTION | 재료규 METERIAL | 격 | 규격 및 도번 SPECIFICATION | 비 고 | |
| 1 01 | | + | PORT | SS400 | | 00AA0532 | KEMAKK | | | |
| | 2 02 | | + | RING | - | | 00CA0002-46 | 6007ZZM | | |
| | 1 03 | | | COL | | S45C | | 00PA0936 | 000722 | |
| | 1 03 | | | + | C형 멈촘링 | SK5M S45C | | 00CA0003-15 | S35 | |
| | 1 05 | | + | SING | 00AA0538 | | | | | |
| | | 2 06 | | TOR | X BOLT | STS304 AC4C | | 00CB0004-20 | M10x15L | |
| | | | | FOO | T PLATE PAINTING | | | 00PA0298 | | |
| | | | 1 08 | HAN | DLE | STS304 | | 00AA0539 | | |
| | | | 4 09 | TOR | K BOLT | STS304 | | 00CB0004-25 | M10x40L | |
| | | | 4 10 | PLA | N WASHER | STS304 | | 00CB0002-10 | м10 | |
| | | | 4 11 | SPR | ING WASHER | STS304 | | 00CB0007-10 | M10 | |
| | | | 4 12 | LOC | K NUT | STS304 | | 00CB0001-10 | м10 | |
| | | | 1 13 | 32A | CAP | URETAN | | 00PA0941 | | |
| | | | 2 14 | 남비 | 머리 태평나사 | STS304 | | 00CB0019-02 | ø4x25L | |
| | | | 1 15 | UND | ERGROUND FOOT | SS400 | | 00AA0535 | | |
| | | | 4 16 | HEX | AGON HEAD BOLT | STS304 | | 00CB0006-42 | M12x45L | |
| | | | 4 17 | HEX | AGON NUT | STS304 | | 00CB0008-12 | M12 | |

NOTE

4 18 PLAN WASHER

- 1. 남자로운 부분 및 배이 제기 잘 됐. 2. 지시 없는 도시리 CI 로 잘 됐. 3. Q.L 텔에 부분(급인 1차을 매실시해만 사용함. 4. 옵션(1장 15에 조립되는 월드(16,17,1하는 양자시해는 양자 월드로 대체로.

STS304

00CB0002-12

M12

| (R) | United Last | D'CO.L1 | ΓD | U PLAY(TEENAGER PARK) | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|---------------|----------------------|-----------------------|-------------|--|
| CHANGE BEST TENNER | 삼 각 법 ^{척 SCALE} 5 3RD ANGLE PROJECTION 1/8 | 단 DIMENSION 위 | 작 성도 일 2011.04.04 | 품명 | FLY ROUND 1 | |
| CHAN CHAN CHAN CHAN CHAN CHAN CHAN CHAN | 제 도 설 DESIGNED 기 | 검 CHECKED 도 | 송 인 APPROVED | 도면번호 pwg. No. | MOV-T003-1 | |
| | J.S.MOON | | | 관련도번 REF. NO. | | |



SITE NAME:

Playground Maintenance Information

| SITE ADDRESS: | |
|---------------------------------------------------------------------------------------------------------------|---------|
| PLANNED BY: | |
| ADDRESS: | |
| PHONE: | |
| | |
| EQUIPMENT INFORMAT | TION |
| | |
| MANUFACURE: | |
| SALES REPRESENTIVE: 1 | |
| ADDRESS: | |
| PHONE: | |
| SALES ORDER NUMBER | |
| DATE OF PURCHASE: | |
| | |
| | |
| INSTALLATION INFORM | AA TION |
| | AA TION |
| INSTALLED BY: | MA TION |
| | MA TION |
| INSTALLED BY: ADDRESS: | MA TION |
| INSTALLED BY: ADDRESS: PHONE: | AA TION |
| INSTALLED BY: ADDRESS: PHONE: DATE OF INSTALLATION: | |
| INSTALLED BY: ADDRESS: PHONE: | |
| INSTALLED BY: ADDRESS: PHONE: DATE OF INSTALLATION: | |
| INSTALLED BY: ADDRESS: PHONE: DATE OF INSTALLATION: INSPECTION INFORMATION | |
| INSTALLED BY: ADDRESS: PHONE: DATE OF INSTALLATION: INSPECTION INFORMATE DEPARTMENT IN CHARGE | |
| INSTALLED BY: ADDRESS: PHONE: DATE OF INSTALLATION: INSPECTION INFORMATE DEPARTMENT IN CHARGE OF INSPACTION: | TION |

MAINTENANCE

Your playground had been designed using the highest quality materials. It is a highly active structure that has been engineered, manufactured and installed for the utmost safety of the user. For this reason, it will require routine inspection and maintenance. Certain heavily used areas and features will wear faster than others. The key to operating a fun, safe and clean playground is to be constantly looking over the equipment during your daily and weekly cleaning.

Routine Maintenance

Consists of tasks are performed on regularly scheduled basis. This may be daily, weekly or monthly. These tasks are more custodial in nature.

Daily/Weekly Visual Inspection: Owner, maintenance inspector, caregiver, or customer on a daily basis shall carry out a visual inspection, if possible, or at least once a week, to identify defect or emerging problems. For example, litter pick-up, sweeping walkways or raking out foreign matter and leveling wood chips or sand.

Preventative Maintenance

Daily

- 1. Loose Bolts or other hardware
- 2. Surface Flooring gaps or trip hazards.
- 3. Anything tied to or added onto equipment
- 4. Unrelated hazards; i.e., broken glass or any other sharp objects

Weekly

- 1. Check damaged equipment: i.e., broken or missing components of equipment or other playground damage caused by vandalism or wear.
- 2. Check any broken or missing handrails, guardrails, protective barriers, or rung or ladder.
- 3. Check and replace if necessary swing "S" hooks.
- 4. Repair plastic coating
- 5. Paint touch-up to slow deterioration of metal components
- 6. Tighten hardware.

Monthly

- 1. Tighten all nuts and bolts.
- 2. Detailed inspection shall be carried out every month.

Other general safety points include:

- No openings on playground equipment should be more than 3 1/2 inches or less than 9 inches where children's heads or bodies could be trapped.
- There should be no v-shaped openings or open areas close to the top of slides where strings or ropes could get caught and cause strangulation.
- Cushioned surfaces should be placed in the fall zone for play equipment. Asphalt, cement, dirt, grass and large rocks are not appropriate surfaces. Nearly 70 percent of all playground injuries are related to falls to the surface.
- There should be no more than two swings in a bay or support structure. Those swings should be at least 24" apart at the seat base and be 30" from the side supports.
- All S-hooks should be closed. Mechanisms on teeter-totters and other equipment where fingers could get pinched should be closed.



CLIENT NAME_____

Routine Maintenance Checklist

SITE NAME_____

Your playground had been designed using the highest quality materials. It is a highly active structure that has been engineered, manufactured and installed for the utmost safety of the user. For this reason, it will require routine inspection and maintenance. We recommend this to be done on a daily basic.

| INSPECTOR | DATE_ | DATE | | | | |
|------------------------------------------------------|-------|------|--------|----------|---------|--|
| FOLHDMENT - A CATECODIES | | О | ACTION | DATE | REPAIRS | |
| EQUIPMENT and CATEGORIES | | K | TAKEN | COMPLETE | OK | |
| A. All COMPOSIT STRUCTURE | | | | | | |
| 1. Stability in ground/fitting | | | | | | |
| 2. No rust or corrosion | | | | | | |
| 3. Entanglement points/areas | | | | | | |
| 4. Faster are tight | | | | | | |
| 5. No missing bolt and nut, etc. | | | | | | |
| 6. Missing hardware (fastener for Clamp | | | | | | |
| 7. No broken or missing parts | | | | | | |
| 8. No sharp point and edges | | | | | | |
| 9. No pinch, crush, sheer points | | | | | | |
| 10. All Joints are safety | | | | | | |
| 11. No cut or cracked on plastic | | | | | | |
| 12. Wood cracking, Max 19mm | | | | | | |
| 13. Caps/Plugs | | | | | | |
| 14. Chains | | | | | | |
| 15. "S" hook | | | | | | |
| B. Swing | | | | | | |
| 1. Swing Seats | | | | | | |
| 2. Swing chains and "S" hooks | | | | | | |
| 3. Ground clearance | | | | | | |
| C. General Site Condition | | | | | | |
| 1. Pathways | | | | | | |
| 2. Border around playground | | | | | | |
| 3. Area is clean. (No littler or broken glass, etc.) | | | | | | |



Detailed Maintenance Check List Record

| CLIENT NAME | | | DATE | | | | | | | |
|-------------|---|---------|--------|------|----------|---------|--|--|--|--|
| INSPECTOR | | | | | | | | | | |
| CHECKLIST | | | | | | | | | | |
| ITEM NUMBER | О | PROBLEM | ACTION | DATE | DATE | REPAIRS | | | | |
| | K | | TAKEN | | COMPLETE | OK | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| <u> </u> | | | 1 | | | | | | | |