


# A Assembly Instructions Super-Climb Midi Art.-No. 4641-2 to set in concrete

Attention! Only use the assembly instructions included in the scope of delivery for the assembly, installation and maintenance of the respective equipment!



Operator: _	 	 	 
Location:			

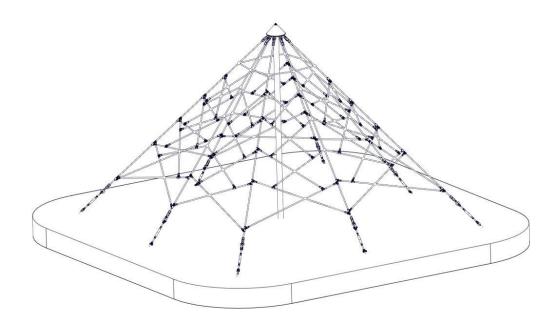

Erste freigegebene Version Revision 00 – 2007-03-21FH

Montageanleitung Revision 15— 2021-08-03 JS neue Montageanleitung

Alle Rechte vorbehalten

© Copyright 2007 Huck Seiltechnik GmbH



# Please note the explanations and abbreviations and notes. For any queries please contact the manufacturer

#### **Contents**

A	Assembly Instructions Super-Climb Maxi ArtNo. 4641-2 to set in concrete	1
1	Introduction Assembling	4
	Datasheet: Super-Climb Maxi ArtNr.4641-2	5
2	Delivery contents (parts list with part numbers)	8
3	Abbreviations	11
4	Installation instructions	12
5	Post installation checks	21
В	Assembly Instructions	23
6	Introduction Maintenance	25
7	General maintenance information	26
8	Maintenance timetable	28
9	Regular maintenance	29
10	Monthly maintenance	30
11	Quarterly maintenance	30
12	Half yearly maintenance	31
13	Annual maintenance	31
14	Maintenance printout	33
15	Hand over document	35
Lis	et of Tables	
Tab	ole 3-1: Delivery contents, in words	8
Tab	ole 3-2: Delivery contents, in symbols	9



#### 1 Introduction Assembling

#### 1.1 General information

This equipment should be installed, inspected, maintained and operated in accordance with EN1176-7 guidelines.

Before installation work commences, please check that you have all of the equipment and fixation components in the parts list provided (see Tables 3-1 and 3-2).

Please consider that the installation has to be carried out only on even terrain (max.slope up to 3%).

Any spare parts that may be required can be obtained directly from your supplier or from Fa. Huck Seiltechnik GmbH

Adress: Huck Seiltechnik GmbH

Dillerberg 3

D-35614 Aßlar/Berghausen Tel. +49 6443 83 11-0 Fax +49 6443 83 11-79

Please do not hesitate to call your supplier if you have any problems during installation or with any other questions. You can reach us at the following **Tel.** +49 6443 83 11-0.



Following installation, complete assembly instructions, maintenance instructions and a maintenance record must be sent to the operator who must confirm receipt in writing. See the last page of this document.



All nuts and bolts are hot-dip galvanised or stainless steel.

One of the characteristics of stainless steel is that uncontrolled cold welding may occur when the nuts are tightened. To prevent this, it is necessary to spray the nuts and bolts with Teflon spray or another similar lubricant.

We hereby confirm that this play equipment has been tested and certified in accordance with the play equipment standard EN 1176-1.



**Datasheet: Super-Climb Midi** Art.-Nr.4641-2

1. Space requirement: 6.10 m x 6.10 m

Safety zone: 7.90 m x 7.90 m Height of equipment: 3.95 m

Height of fall: 3.00 m

Fall protection surface: 59.9 m<sup>2</sup>

#### 2. Required safety surface:

Surface material	Description mm	Minimum thick- ness of layer mm	Maximum height of fall mm
Topsoil grass			<= 1000
Chipped bark	20 – 80 grain size	300 400	<= 2000 <b>&lt;= 3000</b>
Wood chippings	5 – 30 grain size	300 400	<= 2000 <b>&lt;= 3000</b>
Sand	0,2 – 2 grain size	300 400	<= 2000 <= <b>3000</b>
Gravel	2 – 8 grain size	300 400	<= 2000 <b>&lt;= 3000</b>
Other ground materials	As recommended by manufacturer		Critical fall height as checked

Name and overall dimension of the largest component: steel post (1 piece) length 4300 mm, Ø 101,6 mm

Name and weight of the heaviest component: steel post (1 piece) ~75 Kg

Intended age group: 6 years and over

Please note that this equipment is set in concrete.



Concrete: C25/30

Required concrete: ~2,10 m<sup>3</sup>

Foundations/area to be excavated:

excavated (All foundations must be brought to equal level!)

#### Foundation size:

800 x 800 x 400 mm 8x

#### **Excavation size:**

1x 1000 x 1000 x 650 mm (including 10 cm drainage) 8x 800 x 800 x 900 mm (including 10 cm drainage)



Foundation edges must be rounded off (min.R = 100 mm)!

Sizes of fundations are designed for soils class"4-5" (natural ground).

Soil class 3: Non-cohesive to low-cohesive plasticity, sand, gravel and

sand-gravel-mixtures, with very low portion of stones portion of stones (portion > 30% with bigger dia-meter of 63 mm grain

size)

Soil class 4: soft to medium plasticity, interleave bound, with minor portion

of stone (portion < 30% with bigger diameter of 63 mm grain

size)

Soil class 5: Soil class 5: ground with soil class 3 and 4 with big portion of

stones

(portion > 30% with bigger diameter of 63 mm grain size)

IN CASE OF SANDY AND SOFT SOILS, THE SURFACE DIMENSIONS OF

**FOUNDATIONS HAVE TO BE ENLARGED FOR ABOUT 50%!.** 

#### Assembly time, once foundations complete:

After completion of concrete foundations approx. 3 hours

Required assistance: 3 persons.

Required tools: wheel excavator or similar with a lifting height of approx. 4 m height ladder

approx. 4 m long,

spirit level, various wrenches and screwdriver.

Any spare parts which may be required can be obtained directly from your supplier or from

Fa.Huck Seiltechnik GmbH

Adress: Huck Seiltechnik GmbH

Dillerberg 3

D-35614 Aßlar/Berghausen Tel. +49 6443 8311-0 Fax +49 6443 8311-79

We hereby confirm that this item of play equipment has been tested and certified in accordance with the play equipment standard EN 1176.



#### **Drawings / Views**

All optical drawings are showing only the measurements/dimensions and are no mandatory technical views of the complete item.

We reserve the right to change technical details of our articles which are serving for the further development of our articles and are reasonable for the customer.

#### **Measurement tolerances**

Because of the properties and characteristics of the components, minor measurement tolerances compared to the indication on the sketches are possible.

This concerns all shown measurements except the foundation measurements resp. measurements below upper edge ground level/play area.



Delivery contents (parts list with part numbers)

#### 1.2 In words

Table 2-1: Delivery contents, in words

Pos.	Quantity	Element / Description	Size	O.K.	Mis- sing
1	1	Galvanized steel post	Ø 101,6 mm 4,30 m long		
2	1	Climbing net			
3	1	Mast cap rot	Ø 360 mm		
100	8	Anchor chain 10er	1,75 m long		
101	1	Threaded bolt	M16 x 165 mm lg.		
102	1	Hexagon bolt DIN 934	M16		
103	1	Washer DIN 9021	f. M16		
104	1	Cover cap	f. M16		
105	8	Hexagon bolts	M12 x 25 galvanized		
106	8	Tooth lock washer	f. M12		
107	1	Stop nut DIN 985	M16		
108	8	Peg	300 mm long		
110	1	Loctite			
111	8	turnbuckle	M16, galvanized		
112	8	Shackle	M10		
115	16	plugs	For Turnbuckels		



## 1.3 In symbols

Table 2-2: Delivery contents, in symbols

Table 2-2	: Delivery co	ntents, in symbols
Pos.	Quantity	Symbol
1	1	
		Ø 100 x 4,30 m
2	1	
3	1	Ø 159 x 6,3 mm - 6,50 m long  Mast cap
		o o o o o o o o o o o o o o o o o o o
100	8	10er Kette, 1,75 m long
101	1	M16 x 165 mm lg.
102	1	hexagon bolt M16
103	1	washer DIN 9021
104	1	cover cap für M16
	ı	<u> </u>



Table 2-2: Delivery contents, in symbols


Pos.	Quantity	Symbol
105	8	
		hexagon bolts M12 x 35 mm
106	8	tooth lock washer für M16
107	1	
		Stop nut M16
108	1	
		Length= 300 mm
110	1	Loctite 3ml
111	8	M16
112	8	
		M10
115	16	
		For Turnbuckels




	2 Abbreviations							
	1. Clamp							
1 – 5!!	2. Counter							
1 – 311	3. Unscrew							
	4. Retension							
	5. Counter							
!!!	After the unit has been set up and the chains are evenly tensioned on all sides, the remaining (too long) chain links must be removed on site at the top.							
M.Lot	Set up the mast vertically!							
AB	The legally prescribed setting periods must be observed!							
MM.E	Steel mast to be buried !!!							
IVIIVI.L	Compact earth well !!!							
D	C25/30 concrete (for foundations)							
	Q.ty required: 6 m³							
Ne.di.s	Tensioning the net diagonally							
E	Marking on a corner rope (tension rope), above and below							
F	Fall protection							
G	Drainage layer							
M	Turn the mast according to the holes (corner rope)!							
O.K.	Upper edge of playing level / + -0.00 mm							
	Foundation edges must be rounded off (min.R = 100 mm Sizes of fundations are designed for soils class"4-5" (natural ground).							
$\wedge$	Soil class 3: Non-cohesive to low-cohesive plasticity, sand, gravel and sand-gravel-mixtures, with very low portion of stones portion of stones (portion > 30% with bigger diameter of 63 mm grain size)							
Attention	Soil class 4: soft to medium plasticity, interleave bound, with minor portion of stone (portion < 30% with bigger diameter of 63 mm grain size)							
	Soil class 5: Soil class 5: ground with soil class 3 and 4 with big portion of stones							
	(portion > 30% with bigger diameter of 63 mm grain size)							
	IN CASE OF SANDY AND SOFT SOILS, THE SURFACE DIMENSIONS OF FOUNDA							
	TIONS HAVE TO BE ENLARGED FOR ABOUT 50%!.							




# 3 Installation instructions

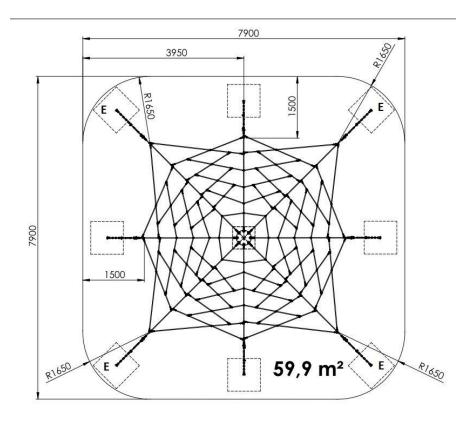

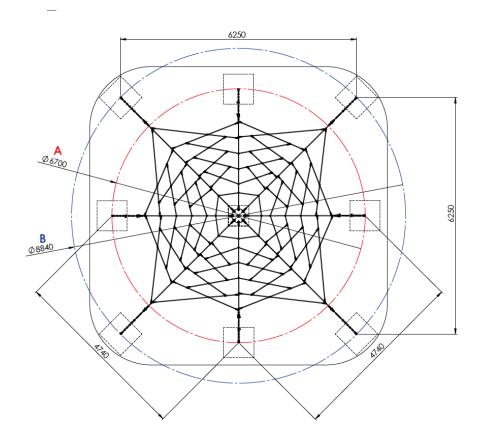



# **Screw locking device!**




Glue all screws, nuts and sleeves with loctite.


(not less than 5 drops!)

(except for lock nut)




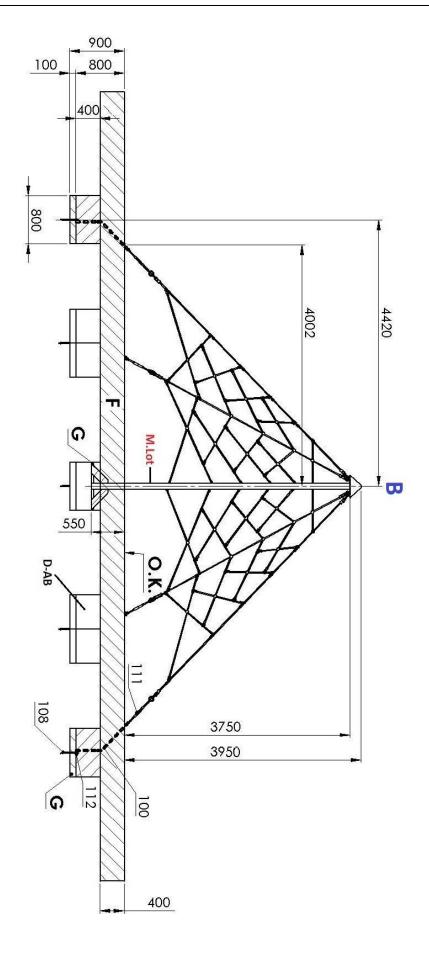




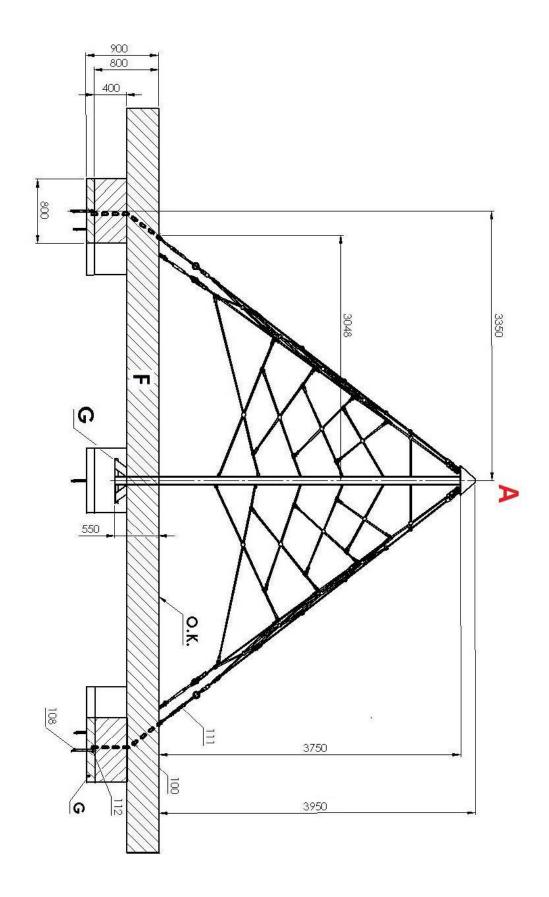




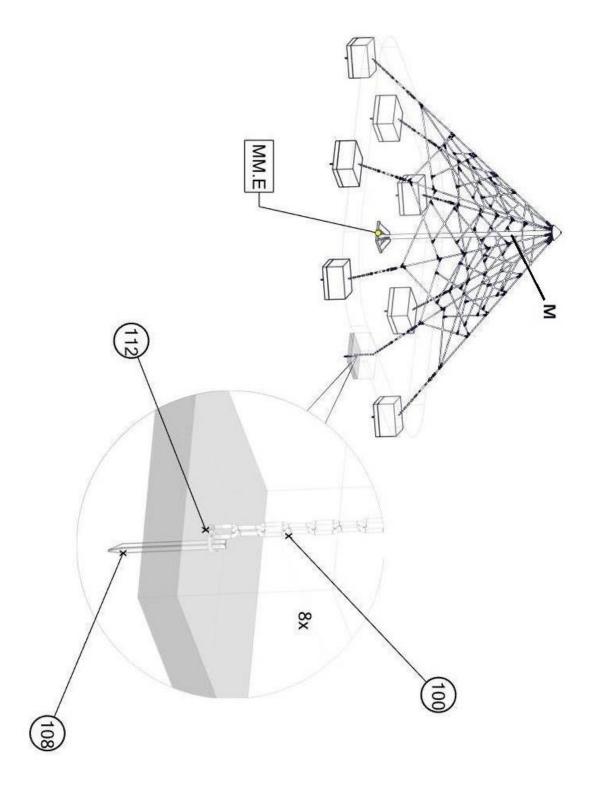




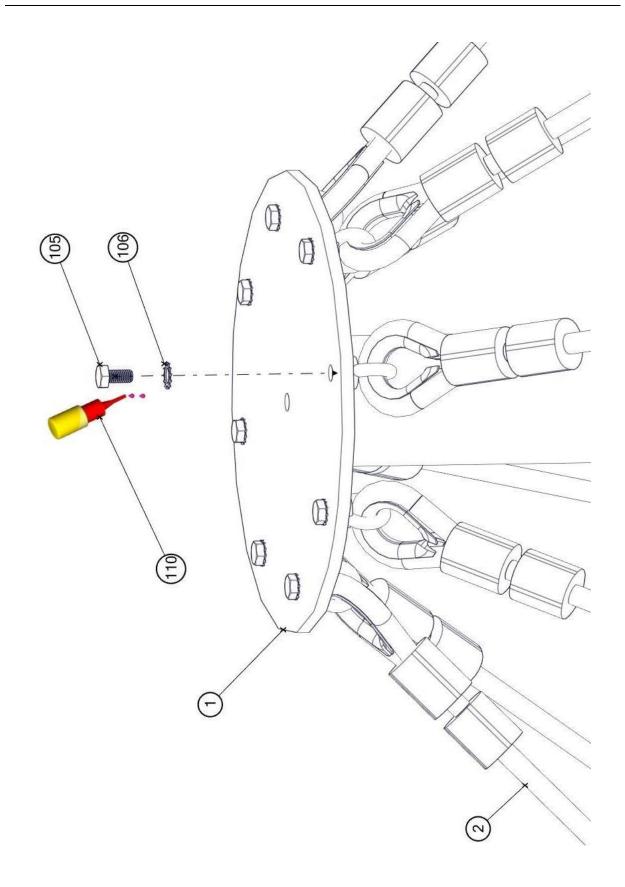




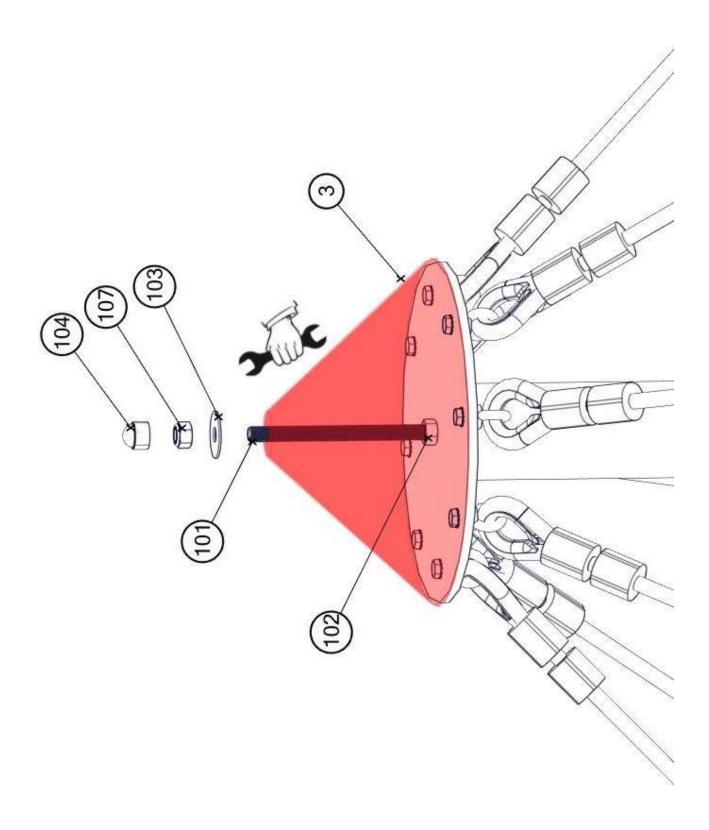



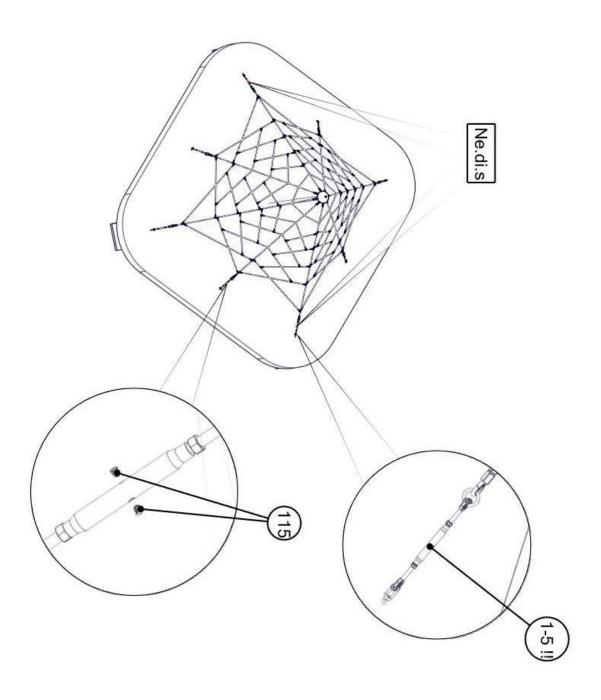



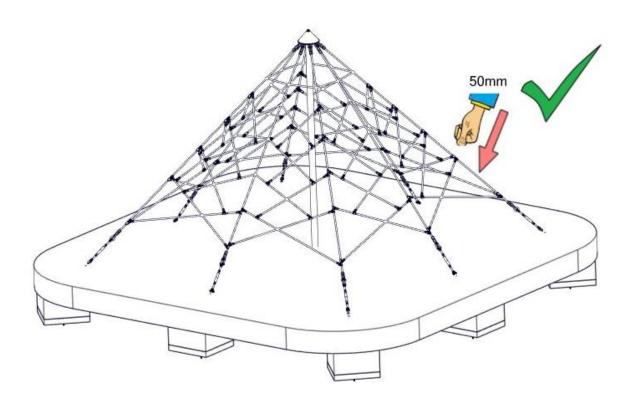



#### 4 Post installation checks



If the equipment has not been installed safely, you must ensure that the public is prevented from using it.

#### 4.1 Marking filler depth

Labelling the posts to show the depth of material provided as fall protection (i.e. loose filler).

#### 4.2 The equipment has not been installed safely in the following cases:

- · Safe equipment installation is not complete.
- The protective surface has not been installed yet.
- Appropriate maintenance work cannot guarantee operational safety.

#### 4.3 Removal of all assembly aids

Please make sure that all assembly aids have been removed from the playing area. The equipment must not be approved for use until this check has been made.

# 4.4 Information about inspection of the equipment before it is used for the first time

There are no special inspection requirements to be met before the equipment is used for the first time.


#### 4.5 Retighten bolts

After one week of play, please retighten all bolts again. Later upon respective maintenance.

.



# B Assembly Instructions Super-Climb Maxi Art.-No. 4641-2 to set in concrete

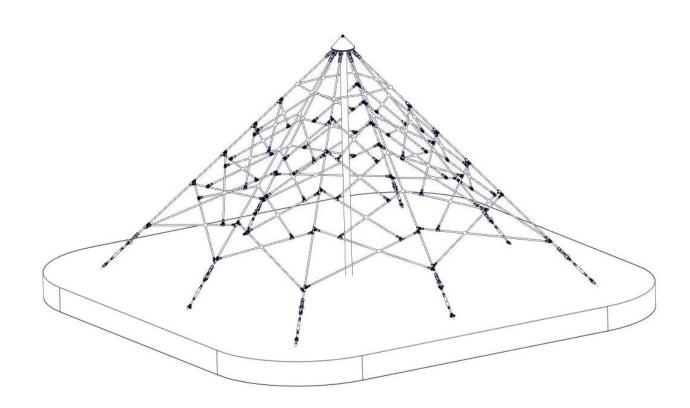



Revisionshistorie Revision 0 – 2007-04.17

Erste freigegebene Version

Wartungsanleitung

Revision 15 – 2021-08-03 neue Montageanleitung

Alle Rechte vorbehalten

© Copyright 2007 Huck Seiltechnik GmbH



#### 5 Introduction Maintenance

#### 5.1 General informations

This equipment should be installed, inspected, maintained and operated in accordance with EN 1176-7 guidelines.



**Please note:** Providing any necessary repairs are carried out, a piece of play equipment that is inspected regularly cannot become so damaged that it is dangerous.

Any spare parts which may be required can be obtained directly from your supplier or from Fa. Huck Seiltechnik GmbH

Adress: Huck Seiltechnik GmbH

Dillerberg 3

D-35614 Aßlar/Berghausen Tel. +49 6443 83 11-0 Fax +49 6443 83 11-79



This equipment should only be assembled, maintained and repaired by persons with the necessary expertise.

A copy of the inspection record should be given to the operator, who must confirm receipt.

This maintenance instruction is based on the standard "EN 1176-1:2017".



#### 6 General maintenance information

#### 6.1 Maintenance intervals

Maintenance intervals are based on average use. Please note that more frequent inspections and/or maintenance are required if the play equipment is subject to intensive use.

#### 6.2 Inspection frequency

The frequency of inspections must be based on actual use. Factors that affect frequency include vandalism, location (e.g. coastal proximity), air pollution and the age of the equipment.

#### 6.3 Maintenance products and procedures

All nuts and bolts are hot-dip galvanised or stainless steel. One of the characteristics of stainless steel is that uncontrolled cold welding may occur when the nuts are tightened. To prevent this, it is necessary to spray the nuts and bolts with Teflon spray or another similar lubricant.

#### 6.4 Spare parts

All spare parts must conform to the manufacturer's specifications.

#### 6.5 Identifying spare parts

All spare parts are listed in the parts list. The parts list follows the installation requirements.

#### 6.6 Special instructions for the disposal of individual equipment components

No special instructions are necessary for the disposal of individual equipment components.

#### 6.7 Special measures during the break-in period

No later than 2 weeks after assembly, all screwed connections should be checked and tightened if necessary.

#### 6.8 Maintenance of protective surfaces

Surfaces providing fall protection must also be maintained regularly. It is particularly important to maintain the correct level of loose surface material and add more if necessary.



#### 6.9 Faults



Faults must be repaired as soon as they are detected. If serious defects that compromise safety cannot be repaired straight away, the public must be prevented from using the equipment with immediate effect.

#### 6.10 Loose screws



Loose screws always cause quality problems and put safety at risk. Therefore, loose screws should always be tightened and checks carried out to ensure that there are no missing screws (e.g. look out for holes you can see through).

#### 6.11 Preventing equipment use

Use of the equipment should be prevented in the event of incomplete installation, disassembly, maintenance, repairs and faults.

#### 6.12 Claims/liability for faults

Steel posts and footings are guaranteed if regular maintenance is carried out and recorded in writing. Our general terms and conditions apply. Maintenance first takes place after 3 years. The steel posts must be excavated as far as the concrete foundations and checked for corrosion.

Zinc paint should be applied to any corroded areas and scratches. Check ropes for abrasion. Retreat any that are very worn.



#### 7 Maintenance timetable

#### 7.1 Special advices

#### 7.1.1 Maintenance interval

We strongly advise you to carry out inspections and maintenance work within the specified periods as use of the equipment, the weather and malicious vandalism cause wear and tear that compromises the safety and function of the equipment.

#### 7.1.2 Maintenance intervals in the event of intensive use

Please note that more frequent inspections and/or maintenance are required if the play equipment is subject to intensive use.

#### 7.1.3 Faults that compromise safety



In the event of a fault that compromises safety, quick action must be taken. This may involve repairing it immediately or shutting down and dismantling the equipment.


#### 7.1.4 Faults that compromise function



Faults that compromise function should also be repaired immediately. Such faults lower the value of the equipment to the user and encourage malicious vandalism, which may render the equipment less safe. Any damage should also be repaired immediately.



# 8 Regular maintenance

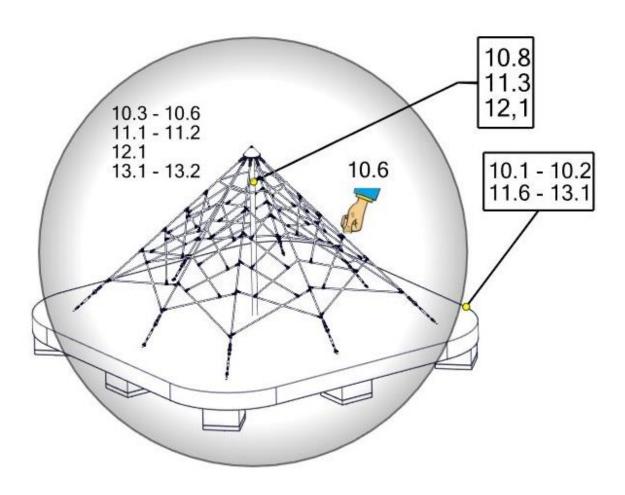



#### Regular maintenance

#### 9 Monthly maintenance

- 9.1 Check the spaces between the equipment and the ground (clearance and height of fall).
- 9.2 Check the ground surface in the area with fall protection for hard objects and loose foundations.
- 9.3 Check all connecting elements and fittings for wear and tear and tighten if necessary. Replace damaged or missing parts.
- 9.4 Check that moving metal parts (joints, springs, etc.) move smoothly and are not worn. Replace if necessary. It is not necessary to lubricate joints as we only use maintenance-free metal roller bearings.
- 9.5 Check all attachments such as chains, ropes, nets, etc. for damage and replace if necessary.
- 9.6 Check rubber parts, sleeves, etc. for wear and tear or damage and replace if necessary.
- 9.7 If necessary, remove excess padding material from the post footings due to danger of rotting.
- 9.8 Check the surface of wooden parts for damage caused by the weather or external influences and mould. Repair or replace if necessary.
- 9.9 Check the surface of plastic and metal parts, e.g. slides, for damage and replace if necessary.

### 10 Quarterly maintenance

- 10.1 Detailed inspection of the operation and stability of the equipment paying particular attention to any wear and tear.
- 10.2 Tighten all forms of attachment.
- 10.3 Repaint and retreat surfaces.
- 10.4 Maintenance of fall protection surfaces.
- 10.5 Lubrication of joints.
- 10.6 Check the height of the fall and top up with loose filler if necessary. If the posts are labelled, top up as far as the mark.
- 10.7 Retighten all bolts



### 11 Half yearly maintenance

11.1 Stability (check posts, bracing, foundations, etc.). Ascertaining whether there are any changes in equipment safety as a result of repairs that have been carried out or components that have been added or replaced.



# **Annual Maintenance**

#### 12 Annual maintenance

- 12.1 Ascertaining that the equipment, foundations and surfaces are safe for operation.
- 12.2 In particular, the equipment should be checked for decay and corrosion. It may be necessary to dig out or excavate certain components in order to do so. Zinc paint should be applied to corroded areas and scratches.



The equipment must be inspected by someone with the necessary expertise in strict compliance with the instructions issued by Huck Seiltechnik GmbH.

A copy of the inspection record should be given to the operator, who must confirm receipt.



## 13 Maintenance printout

Name of item: Super-Climb Midi / ArtNr. 4641-2	
Location:	
Customer or operator:	
(Town, Town council, Kindergarten)	

Date of inspection	Inspector	O.K.	Accessible	Barriered	Defects	Repaired by	Date

Please copy and return once a year after main inspection has been carried out to the manufacturer by Telefax +49 6443 83 11-79 Place the confirmation form in your existing play equipment files.



#### 14 Hand over document

$\wedge$
Attention

After the installation of the equipment pass the installation and maintenance documents to the operator. The operator has to receive the hand over documents. The complete filled and signed hand over document should be sent to the supplier Huck Seiltechnik GmbH per Telefax +49 6443 8311-79

ArtNo.:	4641-2	
Type of item:	Super-Climb Midi	
Serial number:		
Customer or op	erator (Town, Town cour	icil, Kindergarten, etc.):
0		
Competent perso	on in charge:	
Installation com	pany (address):	
Responsible ass	istant (assembler):	
Received the cornance printout,	mplete assembly instruction	ns, maintenance instructions and mainte-
(Signature of ope	erator)	(Signature of installation company)
(Stamp)		· • • • • • • • • • • • • • • • • • • •
Date:		