


### Substructure

The substructure must be frost-stable and level. Steel baseplate for indoor installation on request.

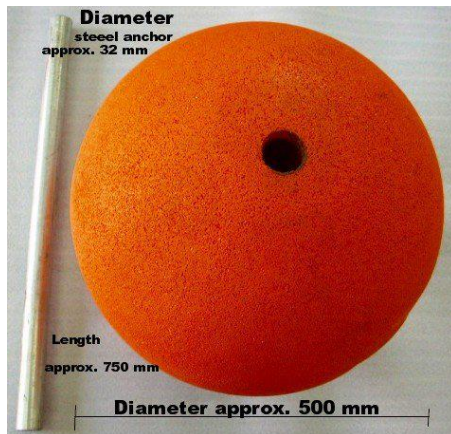

Steel baseplate

### Installation

Install EUROFLEX® ball by optional steel mounting anchor into a prepared fresh concrete bed (grade C12/15) located over a stable-bearing substructure. EUROFLEX® half ball can be installed directly in a fresh concrete bed or glued on a rubber surface like EUROFLEX® slabs.



To avoid colour variations due to differences in sunlight exposure, leave the UV protection film on the products as supplied until just prior to installation.