


Indoor installation

Insert the mounting tubes which are welded into a metal plate, through the holds provided in the base plate (animal base plate).

Apply 1-component polyurethane adhesive cement to the mounting tubes.

Slip the Elephant/Rhino/Dromedary over the mounting tubes; adhesive cement will dry overnight. Base enhances the rigidity of the animals. When glued in this way, the unit can only be separated with great effort for safety reasons.

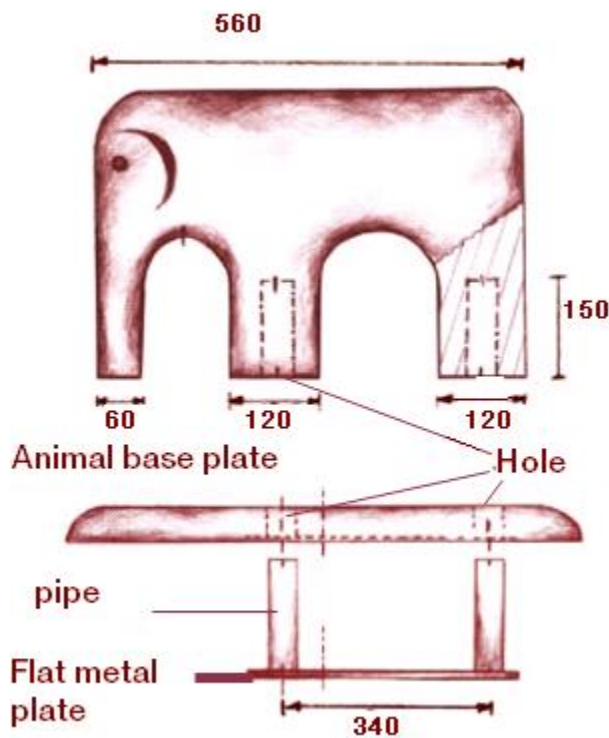

Outdoor installation


Use the cardboard template provided to screw the anchor fixings into the ground at the right intervals.

Use the fixing screw to fix the mounting tubes in the anchors.

Apply 1-component polyurethane adhesive cement to the mounting tubes.

Slip the Elephant/Rhino/Dromedary over the mounting tubes; adhesive cement will dry overnight.

To remove the unit in wintertime, first loosen the fixing screws, pull the animal out of the base anchors together with the mounting tubes. Use the protective cap to keep water out of the base anchor in winter.

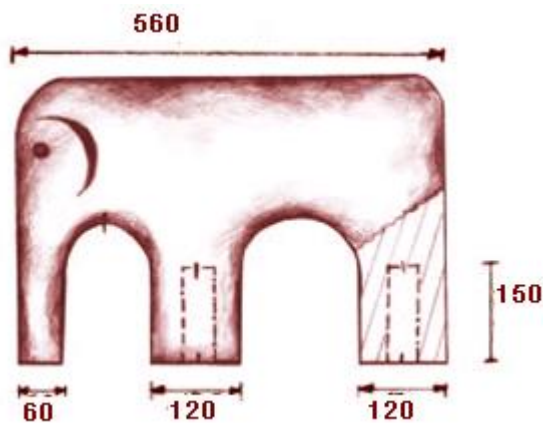

To avoid colour variations due to differences in sunlight exposure, leave the UV protection film on the products as supplied until just prior to installation.

Products:

EUROFLEX® Impact Protection Slabs
EUROFLEX® Sports Pavement Slabs
EUROFLEX® Design Slabs
EUROFLEX® Letter and Number Slabs
EUROFLEX® Riding-Toy Slabs
EUROFLEX® Protect
EUROFLEX® Paving Block Tile
EUROFLEX® Elastic Pavement Blocks
EUROFLEX® Lawn Edging
EUROFLEX® Step Blocks
EUROFLEX® Edge and Corner Slabs
EUROFLEX® Edge and Corner profile
EUROFLEX® Edge Protectors
EUROFLEX® Elephant/ Rhino
EUROFLEX® Rubber Palisades
EUROFLEX® Perimeter Panels

Required quantity of glue: 1 cartridge (310 ml) for every 3 – 4 m of joint length glued.

Type of glue: elastic 1-component polyurethane adhesive cement e.g. Ottocoll P 83 and Ottocoll m 500 (Otto Chemie, Fridolfing/Germany, Tel. +49 (0)8684 – 908-0, Other purchasing sources: specialist retailers or your nearest KRAIBURG representative.

Preparation: The surfaces must be clean, dry and free of grease. Check adhesion to and compatibility with plastic and painted surfaces before installation.

Gluing: Apply adhesive cement from application pistol onto the substrate. The required layer thickness is dependent on the materials being joined. Within 10 minutes, put the upper material in place and apply contact pressure. Due to the pasty consistency of the cement, we recommend maintaining contact pressure until curing is complete. The required curing time is dependent on the layer thickness and the humidity of the ambient air.

Processing temperature: + 5°C until +40°C

Film after 20 min at 23°C

Curing time after 24 h at 23°C

Primer for absorbent subgrade: Designed to improve adhesion on mineral materials e.g. porous concrete is grounding recommended. e.g. OTTO primer 1225 for glue Ottocoll P 83 and M 500; for asphalt use OTTO Primer 1216 and Ottocoll P83

Form of delivery: Bottle 100 ml, 250 ml, 500 ml, 1000 ml

Application: Apply OTTO Primer smooth with a brush.